

VÁLVULA ANGULAR 2 VIAS





2K200-32



2K200-50

180° C

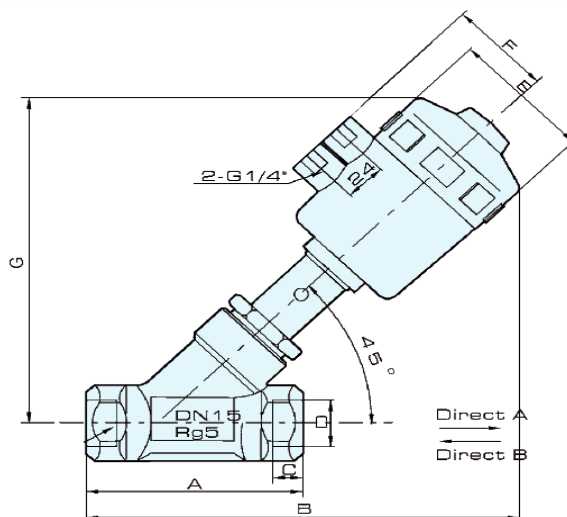

MODELO	A	B	C	D	E	F	G
2K200-15	85	173	12	1/2"	64	44	137
2K200-20	95	178	12	3/4"	64	44	145
2K200-25	105	212	14	1"	80	52	173
2K200-32	118	236	16	1 1/4"	80	52	189
2K200-40	130	230	18	1 1/2"	80	52	189
2K200-50	150	238	20	2"	100	52	250

ESPECIFICAÇÕES

MODELO	2K200-15	2K200-20	2K200-25	2K200-32	2K200-40	2K200-50
ENTR/SAÍDA	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
ATUADOR	50	50	63	63	63	80
ORIFÍCIO	15 mm	20 mm	25 mm	32 mm	40 mm	50 mm
VAZÃO (m³/h)	4,2	8	19	27,5	42	55
PRESSÃO MÁX.	1,6 Mpa	1,1 Mpa	1,1 Mpa	1,5 Mpa	1,25 Mpa	1,0 Mpa
PRES. MIN. ACION.	0,39 Mpa	0,39 Mpa	0,42 Mpa	0,5 Mpa	0,44 Mpa	0,4 Mpa
FLUIDO	ÁGUA, AR, VAPOR, GAS INERTE E ÓLEO					
VISCOSIDADE MÁX.	50 CST					
TEMPERATURA	- 10 a 180° C					